

LOWER COWL


CB1300S/SA

Removal:

1. Remove the clips A (1).
2. Remove the bolts (2).
3. Remove the lower cowl (3).

Installation:

- Installation can be done in the reverse order of removal.

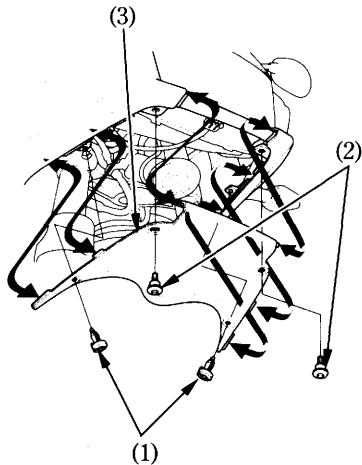

- (1) Clips A
- (2) Bolts
- (3) Lower cowl