


6. Inspect the sprocket teeth for possible wear or damage.

Damaged Sprocket  
Teeth

Worn Sprocket  
Teeth

**REPLACE**

**REPLACE**



Normal Sprocket Teeth


**GOOD**

If the drive chain or sprockets are excessively worn or damaged, they should be replaced. Never use a new chain with worn sprockets; rapid chain wear will result.

Adjustment:

If the drive chain requires adjustment, the procedure is as follows:

1. Place a support block under the engine to raise the rear wheel off the ground.
2. Loosen the rear axle nut (1).

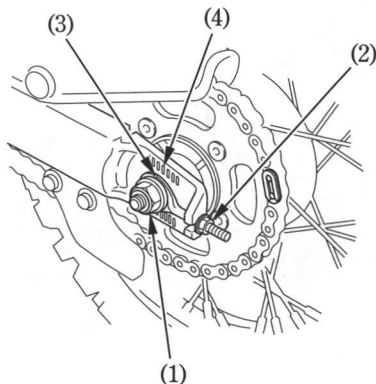

(1) Rear axle nut

(2) Adjusting nut

(3) Adjuster index mark

(4) Graduated scale