




## Throttle

### Throttle Limiter Activation

RIGHT HANDLEBAR

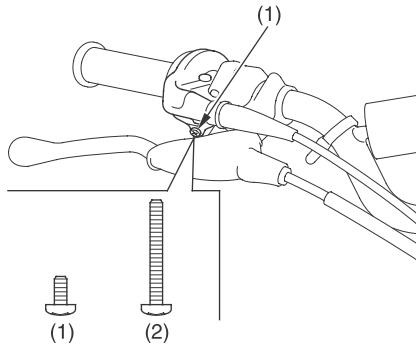

- (1) M5 × 10 screw
- (2) M5 × 40 screw

You can reduce throttle grip movement.

1. Remove the M5 × 10 screw (1) from the throttle housing.
2. Replace the M5 × 10 screw with M5 × 40 screw (2) provided and tighten it fully.

When the M5 × 10 screw is installed, the throttle can be fully opened.

When the M5 × 40 screw is installed, the throttle opening is restricted to approximately 50% and the maximum engine speed is limited.

Do not remove the screw except when activating or deactivating the limiter. Use only provided screws. Do not use any other screw.

Never operate the motorcycle without either the M5 × 10 or M5 × 40 screws installed as debris can enter the housing and cause the throttle to bind.

