


6. Pull the back of the front cowl to release the tabs, then pull the front cowl slightly backwards.



Installation:

1. Position in front of the front cowl and align the tabs with the guides. Then, push the front cowl in place and attach the bolt and clips.
2. Install the rearview mirror assembly.
  - Install the metal plate (9) with its arrow mark (10) facing front.
3. Install the front seat properly (page 72).

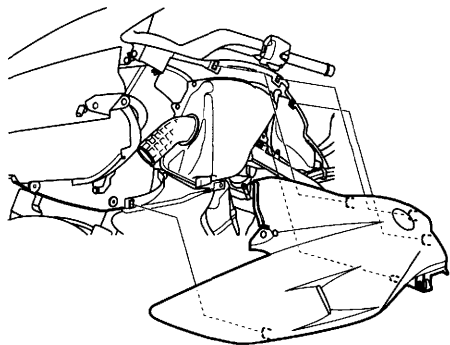