



Check that the fluid level is above the LOWER level mark (1) with the motorcycle in an upright position.

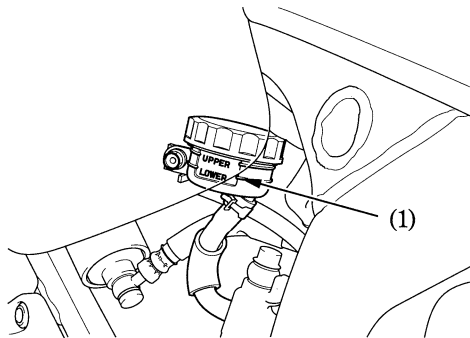

(1) LOWER level mark

Brake fluid must be added to the reservoir whenever the fluid level begins to reach the LOWER level mark (1). Remove the right side cover (page 44). Remove the bolt (2). Remove the reservoir cap (3), diaphragm plate (4), and diaphragm (5). Fill the reservoir with DOT 4 BRAKE FLUID from a sealed container up to the UPPER level mark (6). Reinstall the diaphragm, diaphragm plate, cap and bolt securely.

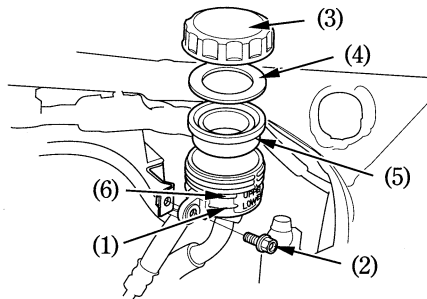

- |                      |                      |
|----------------------|----------------------|
| (1) LOWER level mark | (4) Diaphragm plate  |
| (2) Bolt             | (5) Diaphragm        |
| (3) Reservoir cap    | (6) UPPER level mark |