


## Safety Labels

Safety and information labels on your motorcycle provide important safety information and may warn you of potential hazards that could cause serious injury. Read these labels carefully and don't remove them.

If a label comes off or becomes hard to read, contact your dealer for a replacement.

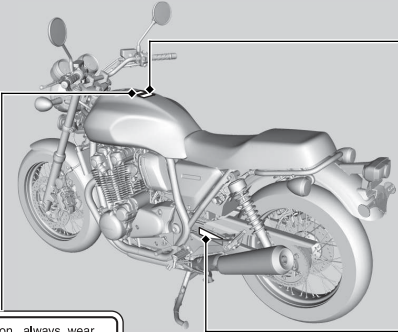


For your protection, always wear your helmet while riding. Read the owner's manual carefully.

**▲ WARNING**

Improper loading can cause a crash and you may be seriously hurt or killed. See "Load Limits and Guidelines" in your Owner's Manual for complete instructions.


**CB1100CA**

TIRE INFORMATION				
Cold tire pressures	Front	250	2.50	36
Up to maximum weight capacity	Rear	250	2.50	42
Up to 90kg(200lbs) load	Front	250	2.50	36
	Rear	250	2.50	42
Tire size	Front	110/80R18 55V		
	Rear	150/80R18 48V		
Min. recommend tire center tread depth	Rear	1.5mm (0.05in.)		
Maximum weight capacity	156kg(345lbs)			

DRIVE CHAIN
Keep chain adjusted and lubricated 30 mm (1 1/4 in.) Freecycle
 Freecycle
Read owner's manual.

**CB1100NA**

TIRE INFORMATION				
Cold tire pressures	Front	250	2.50	36
Up to maximum weight capacity	Rear	250	2.50	42
Up to 90kg(200lbs) load	Front	250	2.50	36
	Rear	250	2.50	42
Tire size	Front	130/90R17 M/C 55W		
	Rear	150/90R17 M/C 55W		
Min. recommend tire center tread depth	Rear	2.0mm (0.079in.)		
Maximum weight capacity	156kg(345lbs)			

DRIVE CHAIN
Keep chain adjusted and lubricated 30 mm (1 1/4 in.) Freecycle
 Freecycle
Read owner's manual.