


If You Have a Flat Tire

Installation

1. Install the side collars and position the wheel between the fork legs. Insert the front axle shaft from the left side, through the left fork leg and wheel hub.
2. Align the end of axle shaft (6) with the surface of fork leg (7).

LEFT FRONT

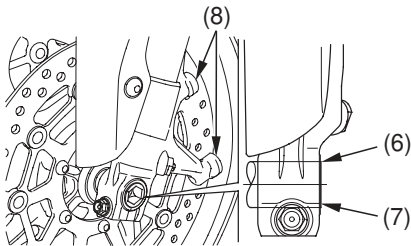

(6) end of axle shaft
(7) surface of fork leg

(8) front fork
spacers

3. Tighten the axle pinch bolt on the left fork leg to the specified torque:
16 lbf·ft (22 N·m , 2.2 kgf·m)
4. Tighten the front axle bolt to the specified torque:
44 lbf·ft (59 N·m , 6.0 kgf·m)
5. Make sure that the front fork spacers (8) are installed into the caliper bracket properly.
6. Install the right and left brake calipers onto the fork legs.
To avoid damaging the brake pads, carefully fit the brake disc (9) between the pads.
7. Install the caliper fixing bolts and tighten to the specified torque:
33 lbf·ft (45 N·m , 4.6 kgf·m)

(cont'd)