


## ▲ WARNING

Improper loading can cause a crash and you may be seriously hurt or killed. See "Load Limits and Guidelines" in your Owner's Manual for complete instructions.

For your protection, always wear your helmet while riding.  
Read the owner's manual carefully.

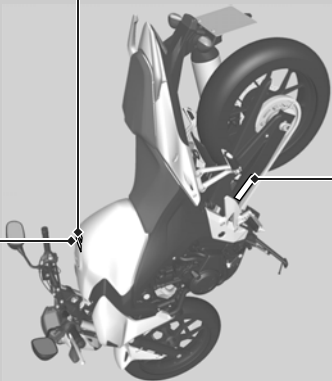

### TIRE INFORMATION

#### Cold tire pressures:

(Up to maximum weight capacity)  
 Front: 250kPa (2.50kgf/cm<sup>2</sup>) 36psi  
 Rear: 290kPa (2.90kgf/cm<sup>2</sup>) 42psi  
 (Up to 90kg(200lbs) load)  
 Front: 250kPa (2.50kgf/cm<sup>2</sup>) 36psi  
 Rear: 290kPa (2.90kgf/cm<sup>2</sup>) 42psi  
 Maximum weight capacity: 168kg(370lbs)  
 Tire size: Front: 120/70ZR17M/C(58W)  
 Rear: 160/60ZR17M/C(69W)

Tire brand Front Rear  
 DUNLOP D222F D222

METZELER ROADTEC 28 INTERACTE ROADTEC 28 INTERACT  
 Min, recommend tire center tread depth,  
 Front 1.5mm (0.06in.) Rear 2.0mm (0.08in.)

Read owner's manual.

This motorcycle is equipped with tubeless tires.