


## Tool Box

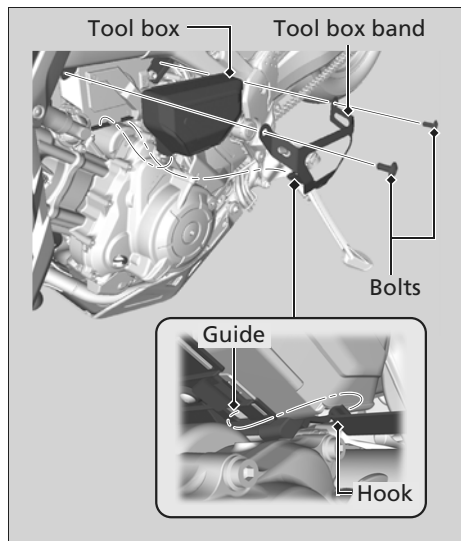

### Removal

1. Remove the bolts using the hex wrench provided on the underside of the front seat. 2 P. 71
2. Remove the tool box band by releasing hook from the guide.
3. Remove the tool box.

### Installation

Install the parts in the reverse order of removal.