

Fig. K1.3 ① Kick starter spindle ② Kick starter spring
③ Ratchet spring

2. KICK STARTER

The kick starter was changed to a new type as shown in Fig. K1-3.

3. CARBURETOR

Setting table

Setting number	59A
Main jet	# 68
Slow jet	# 38
Jet needle setting	
Air screw opening	1 + 1/4 ± 1/8 turns
Floot height (gauge)	21 mm (0.827-in.)

4. FRONT SHOCK ABSORBER (FRONT FORK)

Oil capacity: 130~140 cc (4.4~4.7 ozs.)

Oil specification ATF (Automatic Transmission Fluid)

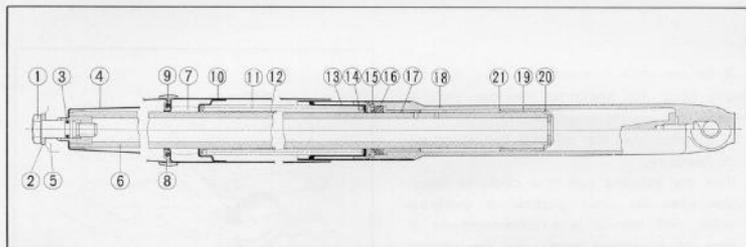


Fig. K1.4

- | | | |
|--------------------------|-------------------------------------|--------------------------|
| ① Front fork bolt | ⑨ Front fork rib | ⑮ Snapping ring 137 mm |
| ② Washer (13.2×24 mm) | ⑩ Fork rib gasket | ⑯ Oil seal |
| ③ O-ring 18.4×2.4 mm | ⑪ Fork under cover guide | ⑰ Front fork pipe guide |
| ④ Front fork upper cover | ⑫ Front shock absorber spring | ⑱ Front fork bottom case |
| ⑤ Fork top bridge | ⑬ Shock absorber spring guide | ⑲ Front fork piston |
| ⑥ Front fork pipe | ⑭ Shock absorber spring under guide | ⑳ Snap ring |
| ⑦ Fork bottom bridge | ⑰ Bottom case cover | ㉑ Piston stop ring |