

Fig. K4.3

- ① Right crankcase cover protector ④ O-ring
 ② 8 mm nut ⑤ Clutch adjusting bolt
 ③ Clutch adjusting bolt washer ⑥ Right crankcase cover

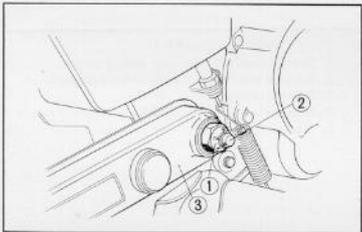


Fig. K4.4 ① Self-locking nut ③ Rear fork
 ② Rear fork pivot bolt

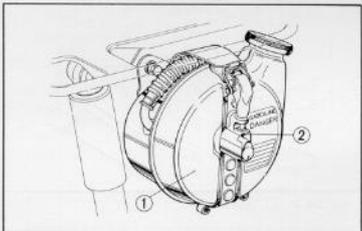



Fig. K4.5 ① Fuel sub tank ② Helmet holder

2. RIGHT CRANKCASE COVER

A new protector was installed to the right crankcase cover.

3. CARBURETOR

Setting table

Setting number	556 A
Main jet	№62
Slow jet	№35
Jet needle setting	 3rd. groove
Air screw opening	1 ± 1/8 turn
Floot height (gauge)	20 mm (0.787-in.)

4. REAR FORK

The rear fork pivot bolt securing nut was changed to a new self-locking nut.

5. FUEL SUB TANK

A new fuel sub tank with a helmet holder was installed on the left lower side of the carrier.
 Capacity: 0,8 lit. (0,2 U.S. gal.)