



INSTALLATION

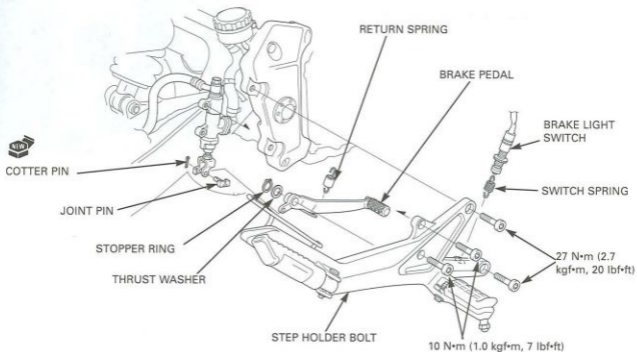

Apply grease to the sliding surface of the brake pedal and footpeg.
Install the brake pedal and thrust washer to the pedal pivot.
Secure the pedal pivot with a snap ring.



Hook the brake pedal return spring.
Install the brake light switch and hook the switch spring.
Connect the brake pedal to the push rod lower joint.
Install the joint pin and secure it with a new cotter pin.

Install the right driver footpeg bracket assembly onto the frame.

