

After '93:

Remove the middle fairings (page 2-6).

Remove the two trim clips and upper fairing lower cover. Remove the four trim clips (see blow) and lower center fairing.


Installation is in the reverse order of removal.

NOTE

- Align the tabs with the tabs of lower center fairing as shown.

After '93:

(1) LOWER COVER

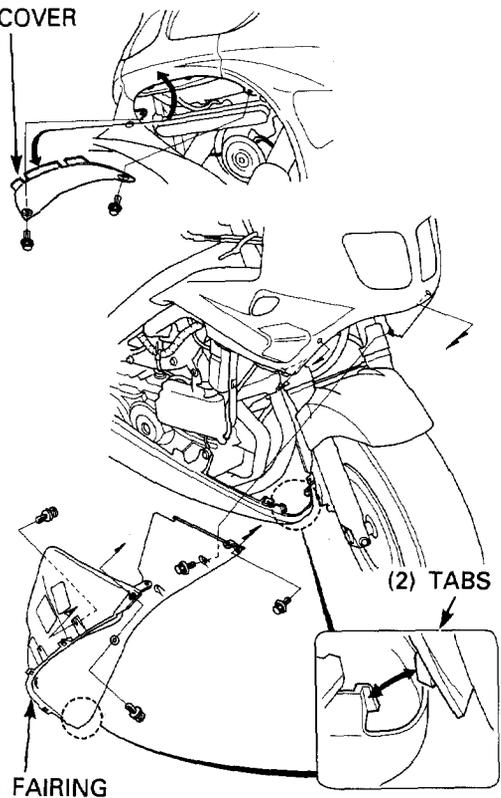


(2) TABS

(3) FAIRING

Trim Clip Removal/Installation (After '93)

Removal

- ① Release by pushing the center pin.
- ② Remove the clip.

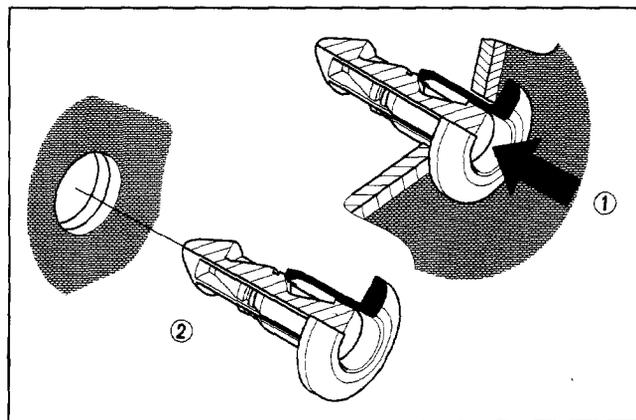

Installation

Raise the center pin by pushing the pin tip back.

- ③ Install the clip.
- ④ Lock by pushing the center pin flush.

