


Headlight Bulb CB1300S/SA

1. Remove the left side cowl (page 88).
2. Pull off the socket (1) without turning.
3. Remove the dust cover (2).
4. Remove the bulb (3) while pressing down on the pin (4).
5. Pull out the bulb without turning.
6. Install a new bulb in the reverse order of removal.
 - Install the dust cover with its “●” mark (5) facing up.

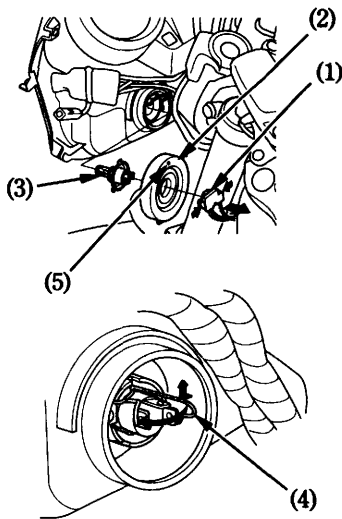

- (1) Socket
(2) Dust cover
(3) Bulb

- (4) Pin
(5) “●” mark